
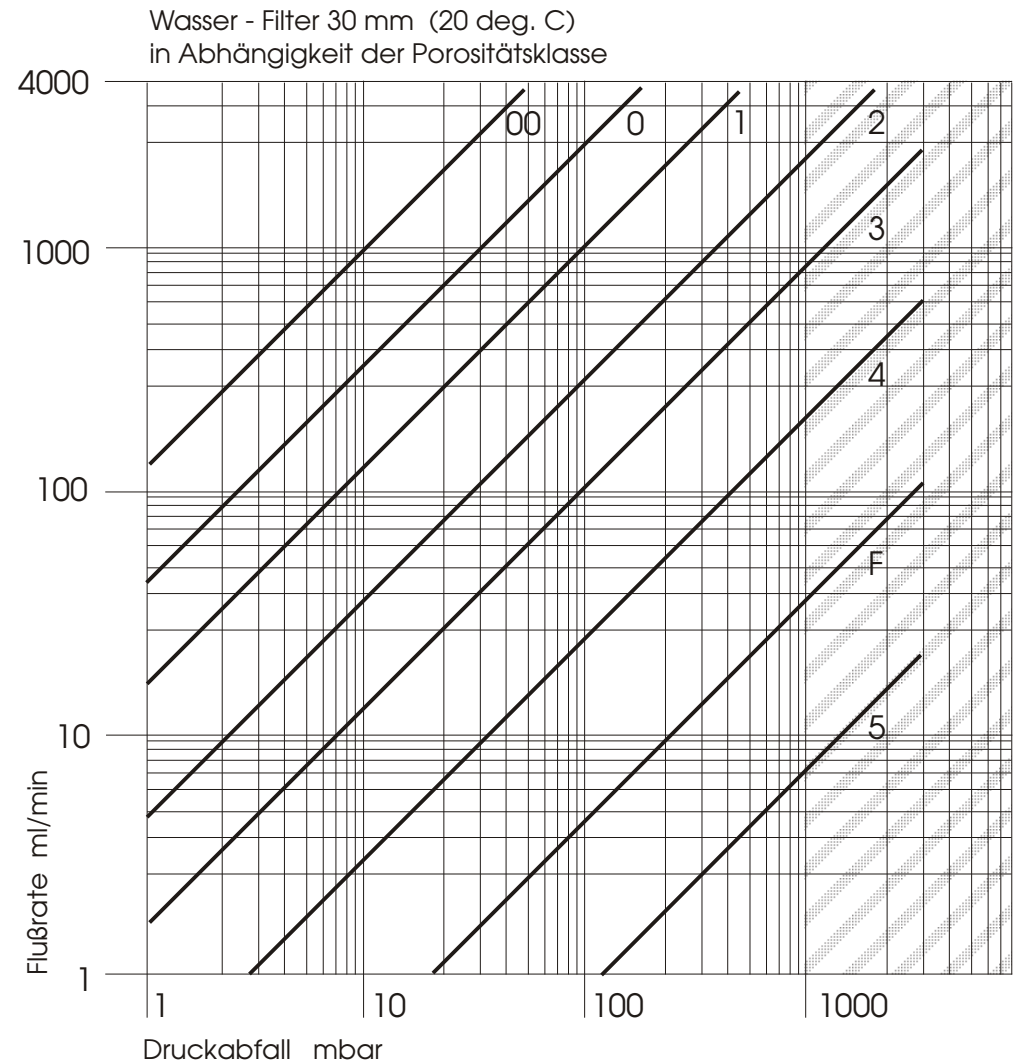


Durchmesser (mm)	10	20	30	40	50	60	90	120	175	200	250	300	350	400	450
Korrekturfaktor	0,13	0,55	1,00	1,50	2,50	4,30	6,80	9,70	15,00	16,30	17,40	25,00	26,70	30,60	32,50

Achtung!
Standard max. Druckbelastung **0,1 Mpa!**
Diagramme nur annähernd maßgebend!

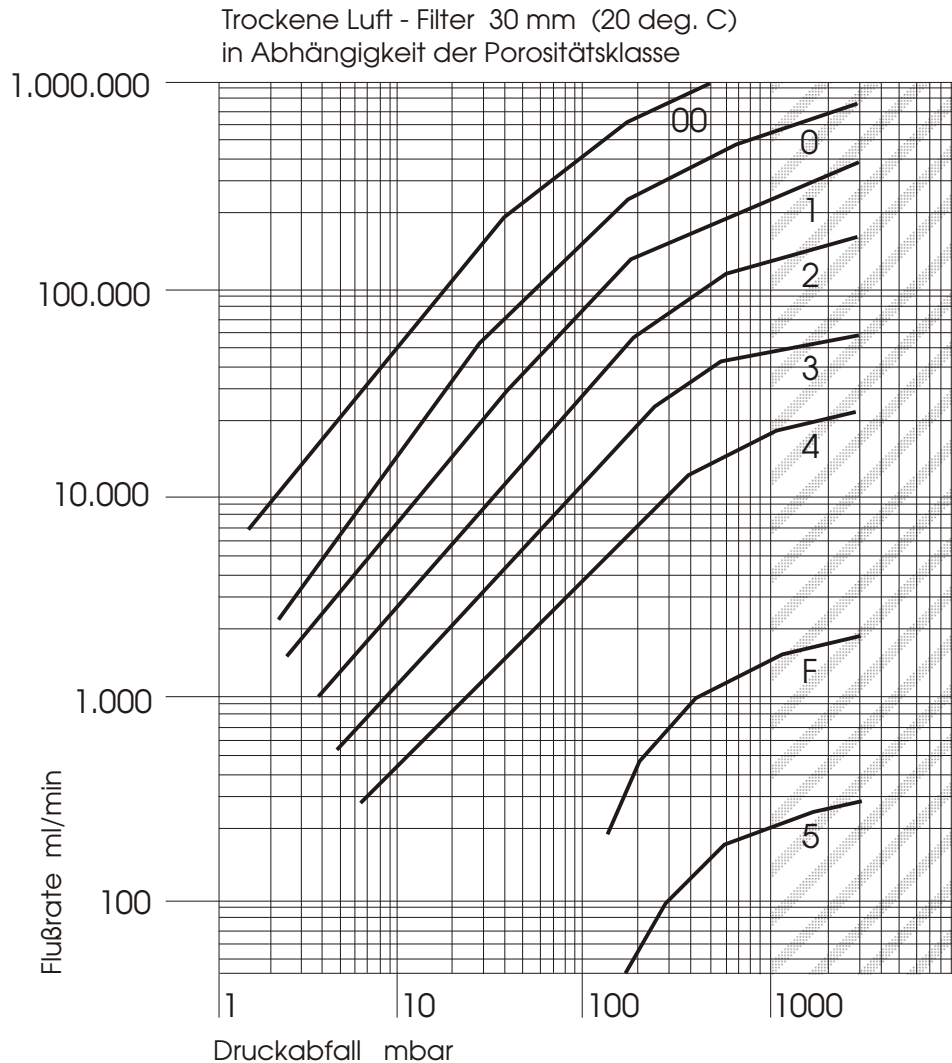

ROBU® Glasfilter-Geräte GmbH
Schützenstrasse 13
D - 57644 Hattert
Germany

Tel. : .. 49 - (0)2662 - 8004-0
Fax : .. 49 - (0)2662 - 8004-40
Email: info@robuglas.com
Web : <http://www.robuglas.com>